


6N $\Phi 6.35 \times 32$ RoHS Compliant



陶瓷保险丝管(延时型) Ceramic Tube Fuse (Time-Lag) 250V/125V

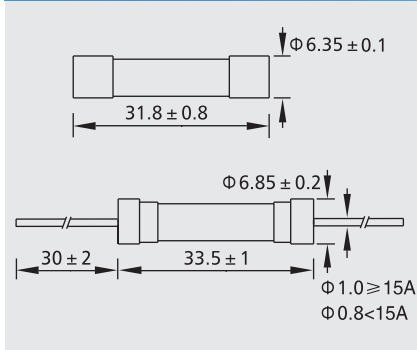

测试标准:
Testing Standard:
UL248-1 UL248-14


额定分断能力:
Interrupting Rating:
10000 Amperes at 125V AC
35 Amperes at 250V AC(500mA~1A)
100 Amperes at 250V AV(1.25A~3.5A)
200 Amperes at 250V AC(4A~10A)
750 Amperes at 250V AC(12A~30A)

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap:nickel plated brass
Ceramic tube:ceramic
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics
电流-时间曲线图

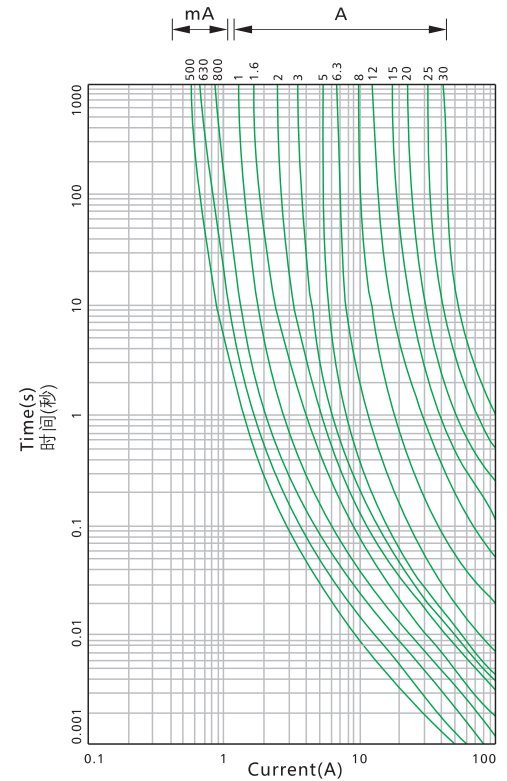

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	120 s Max(小于120秒)
1000%	10 ms Min(大于10毫秒)

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals		
						
6N0500A/B	500mA	250/125V	2.8	●	●	
6N0630A/B	630mA	250/125V	3.0	●	●	
6N0750A/B	750mA	250/125V	3.2	●	●	
6N0800A/B	800mA	250/125V	3.8	●	●	
6N1100A/B	1A	250/125V	4.1	●	●	
6N1125A/B	1.25A	250/125V	6.4	●	●	
6N1150A/B	1.5A	250/125V	9.2	●	●	
6N1160A/B	1.6A	250/125V	10	●	●	
6N1200A/B	2A	250/125V	16	●	●	
6N1250A/B	2.5A	250/125V	20	●	●	
6N1300A/B	3A	250/125V	24	●	●	
6N1315A/B	3.15A	250/125V	26	●	●	
6N1350A/B	3.5A	250/125V	32	●	●	
6N1400A/B	4A	250/125V	36	●	●	
6N1500A/B	5A	250/125V	55	●	●	
6N1600A/B	6A	250/125V	85	●	●	
6N1630A/B	6.3A	250/125V	93	●	●	
6N1800A/B	8A	250/125V	168	●	●	
6N2100A/B	10A	250/125V	262	●	●	
6N2120A/B	12A	250/125V	377			●
6N2150A/B	15A	250/125V	590			●
6N2200A/B	20A	250/125V	1058			●
6N2250A/B	25A	250/125V	1674			●
6N2300A/B	30A	250/125V	2362			●

● 表示已获认证
● 表示认证中